

01

全自动工业洗衣机
AUTOMATIC INDUSTRIAL
WASHING MACHINE

X
G
Q
系列

02

全自动洗脱烘
AUTOMATIC WASHING
DRYING MACHINE

X
T
H
系列

03

全自动烘干机
FULL AUTOMATIC DRIER

H
G
系列

04

烫平机
IRONING MACHINE

Y
P
系列

05

折叠机
FOLDING MACHINE

Z
D
系列

06

石油干洗机
PETROLEUM DRY
CLEANING MACHINE

G
X
S
系列

07

其他系列产品
OTHER PRODUCTS

Q
T
系列

全自动工业洗衣机

FULLY AUTOMATIC INDUSTRIAL WASHING MACHINE



产品介绍

PRODUCT INTRODUCTION

- > 全自动悬浮式工业洗涤脱水机,转笼和外缸接口采用对接方式,可有效避免布草的意外损伤
- > 采用SUS304不锈钢内胆,使用寿命更长,更易清洗。液缸采用特殊的防腐处理,经久耐用;
- > 采用先进的缸体全悬浮结构避震,由原来硬性冲击设计改为压缩弹簧加液压阻尼器组合避震结构使机器达到最佳减震效果。运行平稳,使用时无须基础;
- > 配有自动洗涤分离容器,既不会产生皂粉堆积现象,也不会将产品添加剂不能充分溶解而引起布草的灼伤现象;
- > 使用全电脑控制,变频调速,洗涤程序人机对话,液晶屏幕显示一目了然。具有故障和功能自检系统,使其维修更容易。
- > 电器控制部件均采用优质元件,采用优质特种电机。
- > 颜色款式和其他能源加热方式等皆可定制。
- > Automatic suspension type industrial washing and dehydrating machine, the interface between tating cage and outer cylinder adopts docking mode, which can effectively avoid accidental damage of cloth grass.
- > SUS304 stainless steel roller is adopted, which has longer service life and easier cleaning. The water storage tank adopts special anti-corrosion treatment, which is durable
- > The advanced full suspension structure of cylinder block is adopted for shock absorption, and the original rigid shock design is changed to the combined shock absorber structure of compression spring and hydraulic damper, so that the machine can achieve the best shock absorption effect. It runs smoothly without foundation;
- > Equipped with automatic washing and separation container, it will not produce soap powder accumulation phenomenon, nor will the product additives can not be fully dissolved and cause cloth grass burning phenomenon;
- > Use of computer control, frequency conversion speed regulation, washing program man-machine dialogue, LCD screen display at a glance. With fault and function self checking system, it is easier to maintain.
- > Electrical control components are high-quality components, using high-quality special motor.
- > Color style and other energy heating methods can be customized.

技术参数

Technical parameters

型号	Model	XGQ-50	XGQ-100
额定容量 (Kg)	Rated capacity (kg)	50	100
转笼尺寸 (mm)	Drum size (mm)	1080X600	1200X820
洗涤转速 (R. p. m)	Washing rotation speed (R.p.m)	38	32
高脱转速 (R. p. m)	Rotation speed of high speed dehydration (R.p.m)	700	680
额定电压 (V)	Rated voltage (v)	380	380
电机功率 (Kw)	Motor power (kw)	5.5	7.5
电加热功率 (KW)	Electric heating power (kw)	24	36
长x宽x高 (mm)	Length x width x height (mm)	1540X1560X1850	1740X2020X2250
整机重量 (kg)	Total weight (kg)	2500	3200

全自动工业洗衣机

FULLY AUTOMATIC INDUSTRIAL WASHING MACHINE



产品介绍

PRODUCT INTRODUCTION

- > 全自动悬浮式工业洗涤脱水机,转笼和外缸接口采用对接方式,可有效避免布草的意外损伤
- > 采用SUS304不锈钢内胆,使用寿命更长,更易清洗。液缸采用特殊的防腐处理,经久耐用;
- > 采用先进的缸体全悬浮结构避震,由原来硬性冲击设计改为压缩弹簧加液压阻尼器组合避震结构使机器达到最佳减震效果。运行平稳,使用时无须基础;
- > 配有自动洗涤分离容器,既不会产生皂粉堆积现象,也不会将产品添加剂不能充分溶解而引起布草的灼伤现象;
- > 使用全电脑控制,变频调速,洗涤程序人机对话,液晶屏幕显示一目了然。具有故障和功能自检系统,使其维修更容易。
- > 电器控制部件均采用优质元件,采用优质特种电机。
- > 颜色款式和其他能源加热方式等皆可定制。
- > Automatic suspension type industrial washing and dehydrating machine, the interface between tating cage and outer cylinder adopts docking mode, which can effectively avoid accidental damage of cloth grass.
- > SUS304 stainless steel roller is adopted, which has longer service life and easier cleaning. The water storage tank adopts special anti-corrosion treatment, which is durable
- > The advanced full suspension structure of cylinder block is adopted for shock absorption, and the original rigid shock design is changed to the combined shock absorber structure of compression spring and hydraulic damper, so that the machine can achieve the best shock absorption effect. It runs smoothly without foundation;
- > Equipped with automatic washing and separation container, it will not produce soap powder accumulation phenomenon, nor will the product additives can not be fully dissolved and cause cloth grass burning phenomenon;
- > Use of computer control, frequency conversion speed regulation, washing program man-machine dialogue, LCD screen display at a glance. With fault and function self checking system, it is easier to maintain.
- > Electrical control components are high-quality components, using high-quality special motor.
- > Color style and other energy heating methods can be customized.

技术参数

Technical parameters

型号	Model	XGQ-15	XGQ-20	XGQ-25	XGQ-30
额定容量 (Kg)	Rated capacity (kg)	15	20	25	30
转笼尺寸 (mm)	Drum size (mm)	700X400	700X550	800X500	800X580
洗涤转速 (R. p. m)	Washing rotation speed (R.p.m)	50	48	48	40
高脱转速 (R. p. m)	Rotation speed of high speed dehydration (R.p.m)	800	800	800	750
额定电压 (V)	Rated voltage (v)	220/380	220/380	220/380	380
电机功率 (Kw)	Motor power (kw)	1.5	2.2	2.2	3/4
电加热功率 (KW)	Electric heating power (kw)	6	6	6	6
长x宽x高 (mm)	Length x width x height (mm)	1030X1000X1480	1030X1180X1480	1230X1100X1580	1300X1250X1750
整机重量 (kg)	Total weight (kg)	650	700	750	1200

全自动工业洗衣机

FULLY AUTOMATIC INDUSTRIAL WASHING MACHINE



产品介绍

PRODUCT INTRODUCTION

- > 全自动悬浮式工业洗涤脱水机,转笼和外缸接口采用对接方式,可有效避免布草的意外损伤
- > 采用SUS304不锈钢内胆,使用寿命更长,更易清洗。液缸采用特殊的防腐处理,经久耐用;
- > 采用先进的缸体全悬浮结构避震,由原来硬性冲击设计改为压缩弹簧加液压阻尼器组合避震结构使机器达到最佳减震效果。运行平稳,使用时无须基础;
- > 配有自动洗涤分离容器,既不会产生皂粉堆积现象,也不会将产品添加剂不能充分溶解而引起布草的灼伤现象;
- > 使用全电脑控制,变频调速,洗涤程序人机对话,液晶屏幕显示一目了然。具有故障和功能自检系统,使其维修更容易。
- > 电器控制部件均采用优质元件,采用优质特种电机。
- > 颜色款式和其他能源加热方式等皆可定制。
- > Automatic suspension type industrial washing and dehydrating machine, the interface between tating cage and outer cylinder adopts docking mode, which can effectively avoid accidental damage of cloth grass.
- > SUS304 stainless steel roller is adopted, which has longer service life and easier cleaning. The water storage tank adopts special anti-corrosion treatment, which is durable
- > The advanced full suspension structure of cylinder block is adopted for shock absorption, and the original rigid shock design is changed to the combined shock absorber structure of compression spring and hydraulic damper, so that the machine can achieve the best shock absorption effect. It runs smoothly without foundation;
- > Equipped with automatic washing and separation container, it will not produce soap powder accumulation phenomenon, nor will the product additives can not be fully dissolved and cause cloth grass burning phenomenon;
- > Use of computer control, frequency conversion speed regulation, washing program man-machine dialogue, LCD screen display at a glance. With fault and function self checking system, it is easier to maintain.
- > Electrical control components are high-quality components, using high-quality special motor.
- > Color style and other energy heating methods can be customized.

技术参数 Technical parameters

型号	Model	XGQ-15	XGQ-20	XGQ-25	XGQ-30
额定容量 (Kg)	Rated capacity (kg)	15	20	25	30
转笼尺寸 (mm)	Drum size (mm)	700X400	700X550	800X500	800X580
洗涤转速 (R. p. m)	Washing rotation speed (R.p.m)	50	48	48	40
高脱转速 (R. p. m)	Rotation speed of high speed dehydration (R.p.m)	800	800	800	750
额定电压 (V)	Rated voltage (v)	220/380	220/380	220/380	380
电机功率 (Kw)	Motor power (kw)	1.5	2.2	2.2	3/4
电加热功率 (KW)	Electric heating power (kw)	6	6	6	6
长x宽x高 (mm)	Length x width x height (mm)	1030X1000X1480	1030X1180X1480	1230X1100X1580	1300X1250X1750
整机重量 (kg)	Total weight (kg)	650	700	750	1200

全自动工业洗衣机

FULLY AUTOMATIC INDUSTRIAL WASHING MACHINE



产品介绍

PRODUCT INTRODUCTION

- > 全自动悬浮式工业洗涤脱水机,转笼和外缸接口采用对接方式,可有效避免布草的意外损伤
- > 采用SUS304不锈钢内胆,使用寿命更长,更易清洗。液缸采用特殊的防腐处理,经久耐用;
- > 采用先进的缸体全悬浮结构避震,由原来硬性冲击设计改为压缩弹簧加液压阻尼器组合避震结构使机器达到最佳减震效果。运行平稳,使用时无须基础;
- > 配有自动洗涤分离容器,既不会产生皂粉堆积现象,也不会将产品添加剂不能充分溶解而引起布草的灼伤现象;
- > 使用全电脑控制,变频调速,洗涤程序人机对话,液晶屏幕显示一目了然。具有故障和功能自检系统,使其维修更容易。
- > 电器控制部件均采用优质元件,采用优质特种电机。
- > 颜色款式和其他能源加热方式等皆可定制。
- > Automatic suspension type industrial washing and dehydrating machine, the interface between tating cage and outer cylinder adopts docking mode, which can effectively avoid accidental damage of cloth grass.
- > SUS304 stainless steel roller is adopted, which has longer service life and easier cleaning. The water storage tank adopts special anti-corrosion treatment, which is durable
- > The advanced full suspension structure of cylinder block is adopted for shock absorption, and the original rigid shock design is changed to the combined shock absorber structure of compression spring and hydraulic damper, so that the machine can achieve the best shock absorption effect. It runs smoothly without foundation;
- > Equipped with automatic washing and separation container, it will not produce soap powder accumulation phenomenon, nor will the product additives can not be fully dissolved and cause cloth grass burning phenomenon;
- > Use of computer control, frequency conversion speed regulation, washing program man-machine dialogue, LCD screen display at a glance. With fault and function self checking system, it is easier to maintain.
- > Electrical control components are high-quality components, using high-quality special motor.
- > Color style and other energy heating methods can be customized.

技术参数 Technical parameters

型号	Model	XGQ-15	XGQ-20	XGQ-25	XGQ-30
额定容量 (Kg)	Rated capacity (kg)	15	20	25	30
转笼尺寸 (mm)	Drum size (mm)	700X400	700X550	800X500	800X580
洗涤转速 (R. p. m)	Washing rotation speed (R.p.m)	50	48	48	40
高脱转速 (R. p. m)	Rotation speed of high speed dehydration (R.p.m)	800	800	800	750
额定电压 (V)	Rated voltage (v)	220/380	220/380	220/380	380
电机功率 (Kw)	Motor power (kw)	1.5	2.2	2.2	3/4
电加热功率 (KW)	Electric heating power (kw)	6	6	6	6
长x宽x高 (mm)	Length x width x height (mm)	1030X1000X1480	1030X1180X1480	1230X1100X1580	1300X1250X1750
整机重量 (kg)	Total weight (kg)	650	700	750	1200

全自动工业洗衣机

FULLY AUTOMATIC INDUSTRIAL WASHING MACHINE



产品介绍

PRODUCT INTRODUCTION

- > 全自动悬浮式工业洗涤脱水机,转笼和外缸接口采用对接方式,可有效避免布草的意外损伤
- > 采用SUS304不锈钢内胆,使用寿命更长,更易清洗。液缸采用特殊的防腐处理,经久耐用;
- > 采用先进的缸体全悬浮结构避震,由原来硬性冲击设计改为压缩弹簧加液压阻尼器组合避震结构使机器达到最佳减震效果。运行平稳,使用时无须基础;
- > 配有自动洗涤分离容器,既不会产生皂粉堆积现象,也不会将产品添加剂不能充分溶解而引起布草的灼伤现象;
- > 使用全电脑控制,变频调速,洗涤程序人机对话,液晶屏幕显示一目了然。具有故障和功能自检系统,使其维修更容易。
- > 电器控制部件均采用优质元件,采用优质特种电机。
- > 颜色款式和其他能源加热方式等皆可定制。
- > Automatic suspension type industrial washing and dehydrating machine, the interface between tating cage and outer cylinder adopts docking mode, which can effectively avoid accidental damage of cloth grass.
- > SUS304 stainless steel roller is adopted, which has longer service life and easier cleaning. The water storage tank adopts special anti-corrosion treatment, which is durable
- > The advanced full suspension structure of cylinder block is adopted for shock absorption, and the original rigid shock design is changed to the combined shock absorber structure of compression spring and hydraulic damper, so that the machine can achieve the best shock absorption effect. It runs smoothly without foundation;
- > Equipped with automatic washing and separation container, it will not produce soap powder accumulation phenomenon, nor will the product additives can not be fully dissolved and cause cloth grass burning phenomenon;
- > Use of computer control, frequency conversion speed regulation, washing program man-machine dialogue, LCD screen display at a glance. With fault and function self checking system, it is easier to maintain.
- > Electrical control components are high-quality components, using high-quality special motor.
- > Color style and other energy heating methods can be customized.

技术参数 Technical parameters

型号	Model	XGQ-15	XGQ-20	XGQ-25	XGQ-30
额定容量 (Kg)	Rated capacity (kg)	15	20	25	30
转笼尺寸 (mm)	Drum size (mm)	700X400	700X550	800X500	800X580
洗涤转速 (R. p. m)	Washing rotation speed (R.p.m)	50	48	48	40
高脱转速 (R. p. m)	Rotation speed of high speed dehydration (R.p.m)	800	800	800	750
额定电压 (V)	Rated voltage (v)	220/380	220/380	220/380	380
电机功率 (Kw)	Motor power (kw)	1.5	2.2	2.2	3/4
电加热功率 (KW)	Electric heating power (kw)	6	6	6	6
长x宽x高 (mm)	Length x width x height (mm)	1030X1000X1480	1030X1180X1480	1230X1100X1580	1300X1250X1750
整机重量 (kg)	Total weight (kg)	650	700	750	1200

全自动洗脱烘一体机

AUTOMATIC WASHING DRYING MACHINE



产品介绍

PRODUCT INTRODUCTION

- > 全自动洗脱烘系列产品在工业洗衣机的基础上添加了烘干功能，超的高性价比，适合洗涤烘干量小的客户使用。
 - > 采用SUS304不锈钢内胆，使用寿命更长，更易清洗。液缸采用特殊的防腐处理，经久耐用
 - > 采用先进的缸体全悬浮结构避震，由原来硬性冲击设计改为压缩弹簧加液压阻尼器组合避震结构使机器达到最佳减震效果。运行平稳，使用时无须基础；
 - > 配有自动洗涤分离容器，既不会产生皂粉堆积现象，也不会将产品添加剂不能充分溶解而引起布草的灼伤现象；
 - > 使用全电脑控制，变频调速，洗涤程序人机对话，液晶屏幕显示一目了然。具有故障和功能自检系统，使其维修更容易。
 - > 电器控制部件均采用优质元件，采用优质特种电机。
- > Automatic washing and drying machine series products add drying function on the basis of industrial washing machine, with super high cost performance ratio, which is suitable for customers with small amount of washing and drying.
 - > SUS304 stainless steel roller is adopted, which has longer service life and easier cleaning. The water storage tank adopts special anti-corrosion treatment, which is durable
 - > The advanced full suspension structure of cylinder block is adopted for shock absorption, and the original rigid shock design is changed to the combined shock absorber structure of compression spring and hydraulic damper, so that the machine can achieve the best shock absorption effect. It runs smoothly without foundation;
 - > Equipped with automatic washing and separation container, it will not produce soap powder accumulation phenomenon, nor will the product additives can not be fully dissolved and cause cloth grass burning phenomenon;
 - > Use of computer control, frequency conversion speed regulation, washing program man-machine dialogue, LCD screen display at a glance. With fault and function self checking system, it is easier to maintain.
 - > Electrical control components are high-quality components, using high-quality special motor.

技术参数 Technical parameters

型号	Model	XTH-15	XTH-20	XTH-25	XTH-30
洗涤容量 (Kg)	Washing capacity (kg)	15	20	25	30
烘干容量 (kg)	Drying capacity (kg)	7.5	10	12.5	15
洗涤转速 (R. p. m)	Washing rotation speed (R.p.m)	50	48	48	40
高脱转速 (R. p. m)	Rotation speed of high speed dehydration (R.p.m)	800	800	800	750
额定电压 (V)	Rated voltage (v)	220/380	220/380	220/380	380
电机功率 (Kw)	Motor power (kw)	1.5	2.2	2.2	3/4
电加热功率 (KW)	Electric heating power (kw)	6	6	6	6
长x宽x高 (mm)	Length x width x height (mm)	1030X1000X1480	1030X1180X1480	1230X1100X1580	1300X1250X1750
整机重量 (kg)	Total weight (kg)	650	700	750	1200

全自动工业烘干机

FULLY AUTOMATIC INDUSTRIAL DRYER



产品介绍

PRODUCT INTRODUCTION

- >人性化设计、超大直径装衣门设计, 装衣取衣轻松便捷,介入式对接门口, 避免布草刮伤。
 - >SUS304不锈钢内胆超大通风口设计, 确保热量穿过布草, 双向运转, 避免布草缠绕拉扯。
 - >隔热设计, 采用冷风循环技术, 减少机器内部热量直接向外部环境辐射, 有效的避免了操作者被烫伤。
 - >采用大规格热交换器, 有效加热面大, 升温快, 优化设计散热及风机, 节省能源和缩短烘干时间。
 - >电脑板控制操作简单, 电脑智能化全自动控制, 精确设置运行时间, 烘干温度, 转/停时间等。
 - >传动系统采用两级皮带传动, 结构紧凑, 运行平稳。多翼式平衡风轮设计, 不积毛绒, 噪音低。
 - >颜色款式和其他能源加热方式等皆可定制。
-
- >Humanized design, super large diameter clothing door design, easy and convenient clothing loading and taking, intervention-type docking door, to avoid cloth and grass scratch.
 - >SUS304 stainless steel cylinder design of the large vent, to ensure that heat through the fabric, two-way operation, avoid fabric winding pull.
 - >Heat insulation design, the use of cold air circulation technology, reduce the internal heat of the machine directly to the external environment radiation, effectively avoid operator burnse combined shock absorber structure of compression spring and hydraulic damper, so that the machine can achieve the best shock absorption effect. It runs smoothly without foundation;
 - >Large size heat exchanger is adopted, with large effective heating surface, fast heating, optimized design of heat dissipation and fan, saving energy and shortening drying time.grass burning phenomenon;
 - >Computer board control operation is simple, computer intelligent automatic control, accurate setting of running time, drying temperature, turn/stop time and so on.
 - >The transmission system adopts two-stage belt transmission with compact structure and smooth operation. Multi - wing balance wind wheel design, no pile - up, low noise.
 - >Color style and other energy heating methods can be customized.

技术参数 Technical parameters

型号	Model	HG-15	HG-25	HG-30	HG-35
额定容量 (Kg)	Rated capacity (kg)	15	25	30	35
转笼尺寸 (mm)	Drum size (mm)	750X760	970X670	970X850	970X850
额定电压 (V)	Rated voltage (v)	220/380	380	380	380
电机功率 (Kw)	Motor power (kw)	0.37/0.55	0.75	0.75	0.75
电加热功率 (KW)	Electric heating power (kw)	10/15	21	28	32
长 (mm)	Length (mm)	840	1070	1070	1080
宽 (mm)	width (mm)	1100	1230	1350	1350
高 (mm)	height (mm)	1560	1910	1910	1920
整机重量 (kg)	Total weight (kg)	300	500	600	600

全自动工业烘干机

FULLY AUTOMATIC INDUSTRIAL DRYER



产品介绍

PRODUCT INTRODUCTION

- > 人性化设计、超大直径装衣门设计，装衣取衣轻松便捷，介入式对接门口，避免布草刮伤。
 - > SUS304不锈钢内胆超大通风口设计，确保热量穿过布草，双向运转，避免布草缠绕拉扯。
 - > 隔热设计，采用冷风循环技术，减少机器内部热量直接向外部环境辐射，有效的避免了操作者被烫伤。
 - > 采用大规格热交换器，有效加热面大，升温快，优化设计散热及风机，节省能源和缩短烘干时间。
 - > 电脑板控制操作简单，电脑智能化全自动控制，精确设置运行时间，烘干温度，转/停时间等。
 - > 传动系统采用两级皮带传动，结构紧凑，运行平稳。多翼式平衡风轮设计，不积毛绒，噪音低。
 - > 颜色款式和其他能源加热方式等皆可定制。
-
- > Humanized design, super large diameter clothing door design, easy and convenient clothing loading and taking, intervention-type docking door, to avoid cloth and grass scratch.
 - > SUS304 stainless steel cylinder design of the large vent, to ensure that heat through the fabric, two-way operation, avoid fabric winding pull.
 - > Heat insulation design, the use of cold air circulation technology, reduce the internal heat of the machine directly to the external environment radiation, effectively avoid operator burnse combined shock absorber structure of compression spring and hydraulic damper, so that the machine can achieve the best shock absorption effect. It runs smoothly without foundation;
 - > Large size heat exchanger is adopted, with large effective heating surface, fast heating, optimized design of heat dissipation and fan, saving energy and shortening drying time.grass burning phenomenon;
 - > Computer board control operation is simple, computer intelligent automatic control, accurate setting of running time, drying temperature, turn/stop time and so on.
 - > The transmission system adopts two-stage belt transmission with compact structure and smooth operation. Multi - wing balance wind wheel design, no pile - up, low noise.
 - > Color style and other energy heating methods can be customized.

技术参数 Technical parameters

型号	Model	HG-15	HG-25	HG-30	HG-35
额定容量 (Kg)	Rated capacity (kg)	15	25	30	35
转笼尺寸 (mm)	Drum size (mm)	750X760	970X670	970X850	970X850
额定电压 (V)	Rated voltage (v)	220/380	380	380	380
电机功率 (Kw)	Motor power (kw)	0.37/0.55	0.75	0.75	0.75
电加热功率 (KW)	Electric heating power (kw)	10/15	21	28	32
长 (mm)	Length (mm)	840	1070	1070	1080
宽 (mm)	width (mm)	1100	1230	1350	1350
高 (mm)	height (mm)	1560	1910	1910	1920
整机重量 (kg)	Total weight (kg)	300	500	600	600

全自动工业烘干机

FULLY AUTOMATIC INDUSTRIAL DRYER



产品介绍

PRODUCT INTRODUCTION

- > 人性化设计、超大直径装衣门设计，装衣取衣轻松便捷，介入式对接门口，避免布草刮伤。
 - > SUS304不锈钢内胆超大通风口设计，确保热量穿过布草，双向运转，避免布草缠绕拉扯。
 - > 隔热设计，采用冷风循环技术，减少机器内部热量直接向外部环境辐射，有效的避免了操作者被烫伤。
 - > 采用大规格热交换器，有效加热面大，升温快，优化设计散热及风机，节省能源和缩短烘干时间。
 - > 电脑板控制操作简单，电脑智能化全自动控制，精确设置运行时间，烘干温度，转/停时间等。
 - > 传动系统采用两级皮带传动，结构紧凑，运行平稳。多翼式平衡风轮设计，不积毛绒，噪音低。
 - > 颜色款式和其他能源加热方式等皆可定制。
-
- > Humanized design, super large diameter clothing door design, easy and convenient clothing loading and taking, intervention-type docking door, to avoid cloth and grass scratch.
 - > SUS304 stainless steel cylinder design of the large vent, to ensure that heat through the fabric, two-way operation, avoid fabric winding pull.
 - > Heat insulation design, the use of cold air circulation technology, reduce the internal heat of the machine directly to the external environment radiation, effectively avoid operator burnse combined shock absorber structure of compression spring and hydraulic damper, so that the machine can achieve the best shock absorption effect. It runs smoothly without foundation;
 - > Large size heat exchanger is adopted, with large effective heating surface, fast heating, optimized design of heat dissipation and fan, saving energy and shortening drying time.grass burning phenomenon;
 - > Computer board control operation is simple, computer intelligent automatic control, accurate setting of running time, drying temperature, turn/stop time and so on.
 - > The transmission system adopts two-stage belt transmission with compact structure and smooth operation. Multi - wing balance wind wheel design, no pile - up, low noise.
 - > Color style and other energy heating methods can be customized.

技术参数 Technical parameters

型号	Model	HG-15	HG-25	HG-30	HG-35
额定容量 (Kg)	Rated capacity (kg)	15	25	30	35
转笼尺寸 (mm)	Drum size (mm)	750X760	970X670	970X850	970X850
额定电压 (V)	Rated voltage (v)	220/380	380	380	380
电机功率 (Kw)	Motor power (kw)	0.37/0.55	0.75	0.75	0.75
电加热功率 (KW)	Electric heating power (kw)	10/15	21	28	32
长 (mm)	Length (mm)	840	1070	1070	1080
宽 (mm)	width (mm)	1100	1230	1350	1350
高 (mm)	height (mm)	1560	1910	1910	1920
整机重量 (kg)	Total weight (kg)	300	500	600	600

全自动工业烘干机

FULLY AUTOMATIC INDUSTRIAL DRYER



产品介绍

PRODUCT INTRODUCTION

- > 人性化设计、超大直径装衣门设计，装衣取衣轻松便捷，介入式对接门口，避免布草刮伤。
 - > SUS304不锈钢内胆超大通风口设计，确保热量穿过布草，双向运转，避免布草缠绕拉扯。
 - > 隔热设计，采用冷风循环技术，减少机器内部热量直接向外部环境辐射，有效的避免了操作者被烫伤。
 - > 采用大规格热交换器，有效加热面大，升温快，优化设计散热及风机，节省能源和缩短烘干时间。
 - > 电脑板控制操作简单，电脑智能化全自动控制，精确设置运行时间，烘干温度，转/停时间等。
 - > 传动系统采用两级皮带传动，结构紧凑，运行平稳。多翼式平衡风轮设计，不积毛绒，噪音低。
 - > 颜色款式和其他能源加热方式等皆可定制。
-
- > Humanized design, super large diameter clothing door design, easy and convenient clothing loading and taking, intervention-type docking door, to avoid cloth and grass scratch.
 - > SUS304 stainless steel cylinder design of the large vent, to ensure that heat through the fabric, two-way operation, avoid fabric winding pull.
 - > Heat insulation design, the use of cold air circulation technology, reduce the internal heat of the machine directly to the external environment radiation, effectively avoid operator burnse combined shock absorber structure of compression spring and hydraulic damper, so that the machine can achieve the best shock absorption effect. It runs smoothly without foundation;
 - > Large size heat exchanger is adopted, with large effective heating surface, fast heating, optimized design of heat dissipation and fan, saving energy and shortening drying time.grass burning phenomenon;
 - > Computer board control operation is simple, computer intelligent automatic control, accurate setting of running time, drying temperature, turn/stop time and so on.
 - > The transmission system adopts two-stage belt transmission with compact structure and smooth operation. Multi - wing balance wind wheel design, no pile - up, low noise.
 - > Color style and other energy heating methods can be customized.

技术参数 Technical parameters

型号	Model	HG-50	HG-100
额定容量 (Kg)	Rated capacity (kg)	50	100
转笼尺寸 (mm)	Drum size (mm)	1150X890	1500X1000
额定电压 (V)	Rated voltage (v)	380	380
电机功率 (Kw)	Motor power (kw)	1.1	2.2
电加热功率 (KW)	Electric heating power (kw)	40	70
长 (mm)	Length (mm)	1250	1600
宽 (mm)	width (mm)	1600	1700
高 (mm)	height (mm)	2200	2410
整机重量 (kg)	Total weight (kg)	800	1000

YP系列烫平机


YP SERIES IRONING MACHINE

产品介绍

PRODUCT INTRODUCTION

- > 辊筒均采用304不锈钢制成,传送轴采用精拉钢管,外套不锈钢管,大大延长整机使用寿命。
- > 采用变频控制,可根据不同的织物进行速度调节,传动轮采用皮带轮和链轮相结合,超强承载,运行平稳。
- > 配有输送带的自动涨紧机构,可根据能源的供给和织物的厚度等状况,自动将输送带涨紧至最佳状态,提高熨平质量。
- > 辊筒数量、辊筒直径、熨烫宽度可根据客户要求进行定制
- > 颜色款式和其他能源加热方式等皆可定制。

- > The roller is made of 304 stainless steel, the transmission shaft is made of fine drawn steel tube, with stainless steel tube, which greatly extends the service life of the whole machine.two-way operation, avoid fabric winding pull.
- > It adopts frequency conversion control, which can adjust the speed according to different fabrics. The driving wheel adopts belt wheel and sprocket wheel, which can bear super strong load and run smoothly.at the machine can achieve the best shock absorption effect. It runs smoothly without foundation;
- > Equipped with a conveyor belt automatic tensioning mechanism, according to the supply of energy and fabric thickness and other conditions, automatic tensioning conveyor belt to the best state, improve the ironing quality.ssipation and fan, saving energy and shortening drying time.grass burning phenomenon;
- > The number, diameter and ironing width of rollers can be customized according to customer requirements.
- > Color style and other energy heating methods can be customized.

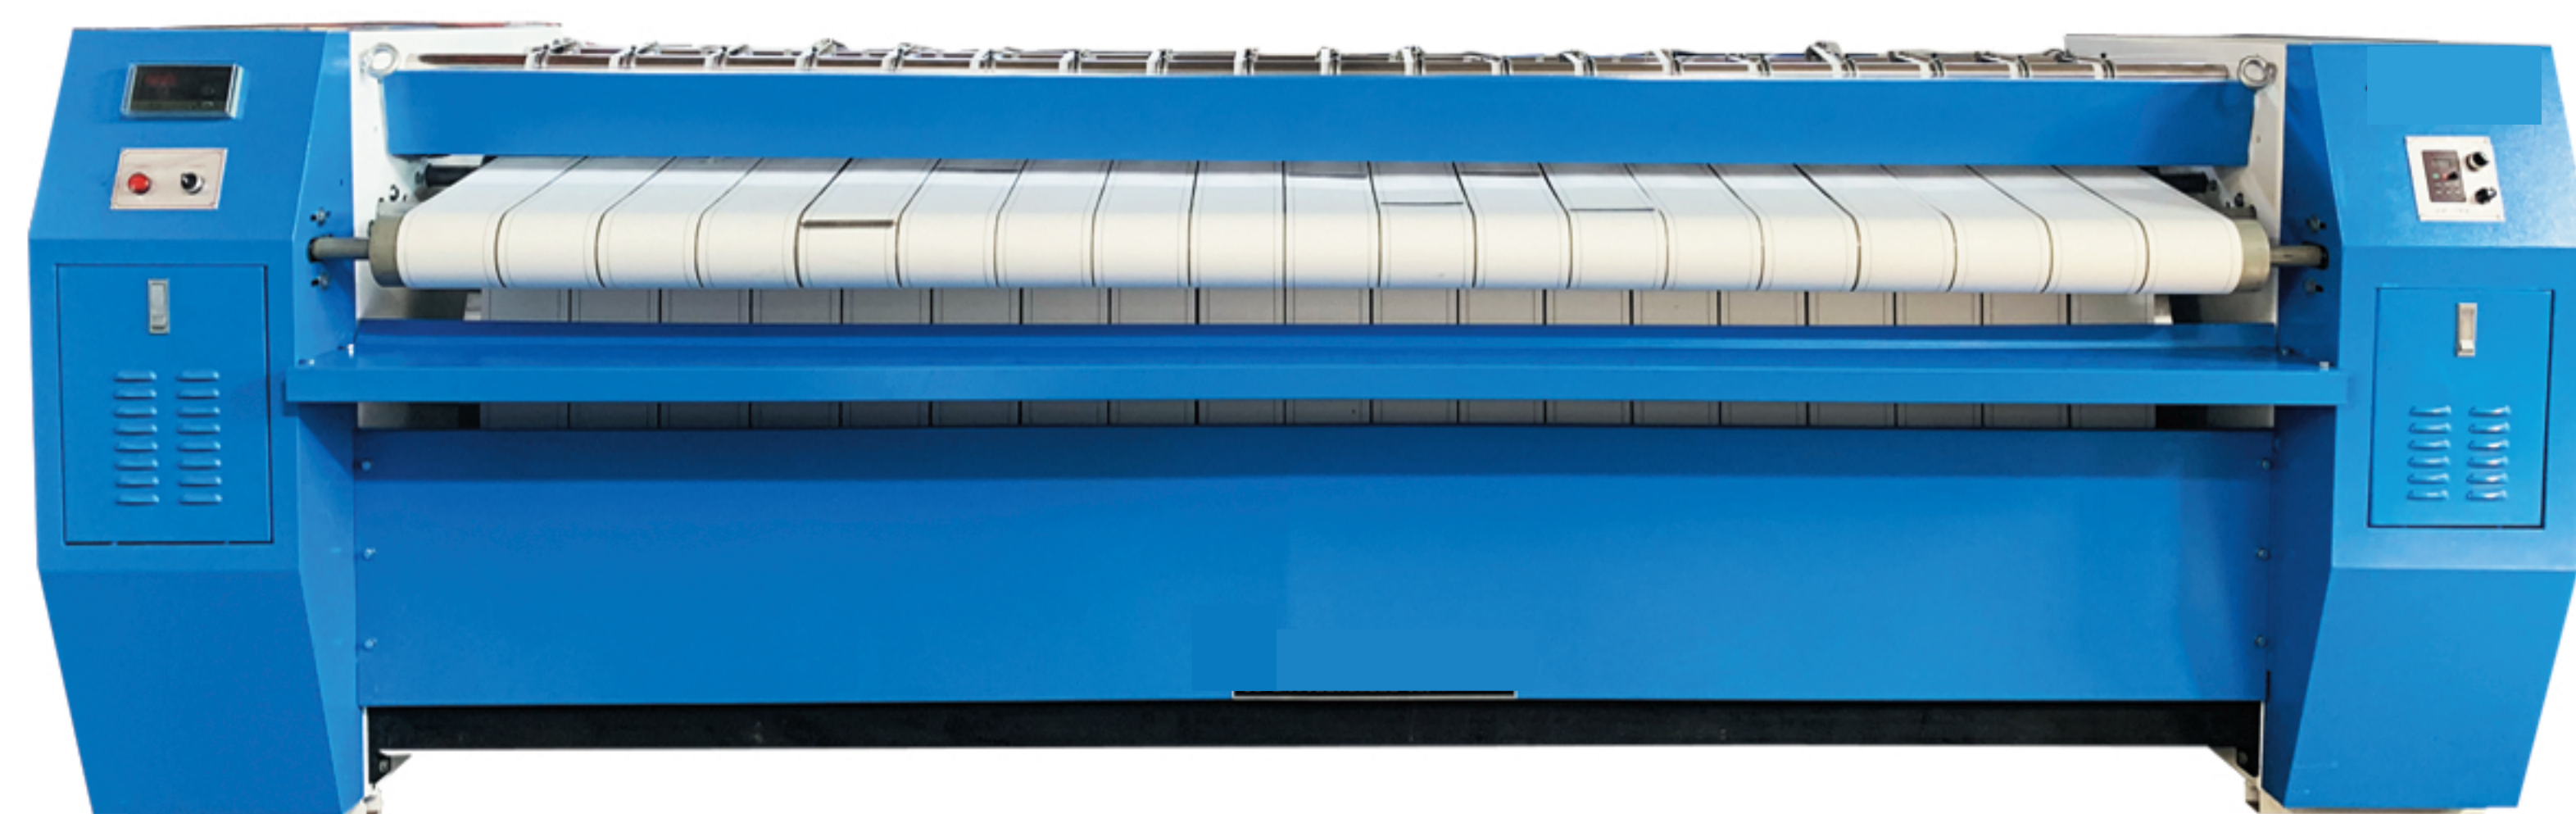

技术参数 Technical parameters

型号	Model	YPI-2500	YPI-2800	YPI-3000
最大熨平宽度 (mm)	Maximum ironing width (mm)	2500	2800	3000
熨平速度 (m/min)	Ironing speed (m/min)	0-6	0-6	0-6
最高熨烫温度 (°C)	Maximum ironing temperature (°C)	200	200	200
电机功率 (Kw)	Motor power (kw)	1.5	1.5	1.5
电加热功率 (KW)	Electric heating power (kw)	30.6	34.2	37
长 (mm)	Length (mm)	3740	3900	4000
宽 (mm)	width (mm)	1340	1340	1340
高 (mm)	height (mm)	1280	1280	1280
整机重量 (kg)	Total weight (kg)	1000	1100	1200

ZD系列折叠机

ZD SERIES FOLDING MACHINE



产品介绍

PRODUCT INTRODUCTION

- > 折叠机是熨平机的后续配套设备. 它具备两横三纵共五折的折叠功能, 超大的折叠范围。两套独立的驱动电机由变频器控制, 具备折叠速度在50M/MIN内无级可调的功能, 可与各种类型的熨平机相匹配。采用PLC可编程控制器, 抗干扰性强。高度智能化的液晶显示触摸屏操作系统, 具有良好的人机界面, 完善的自诊断功能和安全保护系统便于机器的日常使用和维护, 防静电功能更增加了机器的工作可靠性和稳定性。
- > 颜色款式和其他能源加热方式等皆可定制。

> The folding machine is the subsequent supporting equipment of the ironing machine. It has the folding function of two horizontal and three vertical folds with a total of five fold, with a large folding range. Two independent drive motors are controlled by frequency converter, with the function of stepless adjustable folding speed within 50m/min, which can be matched with various types of ironing machines. PLC programmable controller is used to prevent interference. Highly intelligent LCD touch screen operating system, with a good man-machine interface, perfect self-diagnosis function and safety protection system for the daily use and maintenance of the machine, anti-static function has increased the working reliability and stability of the machine.

> Color style and other energy heating methods can be customized.

技术参数 Technical parameters

型号	Model	ZD-3000	ZD-3300
最大折叠宽度 (mm)	Maximum folding width (mm)	3000	3300
最大折叠速度 (m/min)	Maximum folding speed(m/min)	50	50
最大折叠数	Maximum fold	5	5
电机功率 (Kw)	Motor power (kw)	1.3	1.3
额定电压 (V)	Voltage (V)	380	380
长 (mm)	Length (mm)	4500	4800
宽 (mm)	width (mm)	2800	2800
高 (mm)	height (mm)	1860	1860
整机重量 (kg)	Total weight (kg)	1600	1700

全自动石油干洗机

AUTOMATIC OIL DRY CLEANER



产品介绍

PRODUCT INTRODUCTION

- > 多种洗涤程序，可根据衣物脏污程度，任意选择。全自动低噪音，低气味，低能耗。
- > 对皮革、裘皮、羊绒、婚纱、丝绒、绸缎等各种高档面料有独特的清洗效果。
- > 强大的活性炭过滤和配有高精度的纸质过滤系统，保证了溶剂的纯洁度，保证洗出的衣物洁净靓丽。而且节约洗涤剂消耗，降低了成本。
- > 卡式活性炭过滤器，净油、去味、脱酸、杀菌；对衣物的面料无损伤，不褪色，洗涤时不需剪掉纽扣。
- > 采用高品质的专用微电脑、先进的变频器，有效地保证了设备程序自控稳定，高速脱水，保证了后序烘干效率，效果极佳。
- > 结构设计为全悬浮、高防震式，有效地提高设备的稳定性，避震特强。运行平稳，噪音低。
- > 颜色款式和其他能源加热方式等皆可定制。
- > A variety of washing procedures can be selected according to the degree of soiling. Automatic, low noise, low odor, low energy consumption.
- > It has unique cleaning effect on leather, fur, cashmere, wedding dress, velvet, satin and other high-grade fabrics.
- > Strong activated carbon filtration and high-precision paper filtration system ensure the purity of the solvent and clean and beautiful clothes. The amount of detergent is saved and the cost is reduced.
- > Card type activated carbon filter, oil purification, deodorization, deacidification, sterilization; no damage to the fabric, no fading, no need to cut buttons when washing.
- > With high quality special microcomputer and advanced frequency converter, the automatic control and stability of the equipment program are effectively guaranteed, the high-speed separation from detergent, and the post drying efficiency is guaranteed, and the effect is excellent.
- > The structure design is full suspension and high shock proof, which can effectively improve the stability of the equipment and has strong shock absorption. Stable operation, low noise
- > Color style and other energy heating methods can be customized.

技术参数 Technical parameters

型号	Model	GXS-8	GXS-10	GXS-12
额定容量 (Kg)	Rated capacity (kg)	8	10	12
转笼尺寸 (mm)	Drum size (mm)	630X320	630X370	630X370
洗涤转速 (R. p. m)	Washing rotation speed (R.p.m)	40-45	40-45	40-45
额定电压 (V)	Rated voltage (v)	220	220	220
电机功率 (Kw)	Motor power (kw)	1.5	1.5	2.2
长x宽x高 (mm)	Length x width x height (mm)	1580X830X1730	1580X900X1730	1580X900X1730
整机重量 (kg)	Total weight (kg)	600	650	650

OTHER SERIES PRODUCT DISPLAY




消毒柜
Disinfect cabinet



烫台、全蒸汽熨斗、蒸汽发生器
Ironing table/steam ironer /steam generator



ZRT-10型人像熨烫机
ZRT-10 Automatic garment finisher

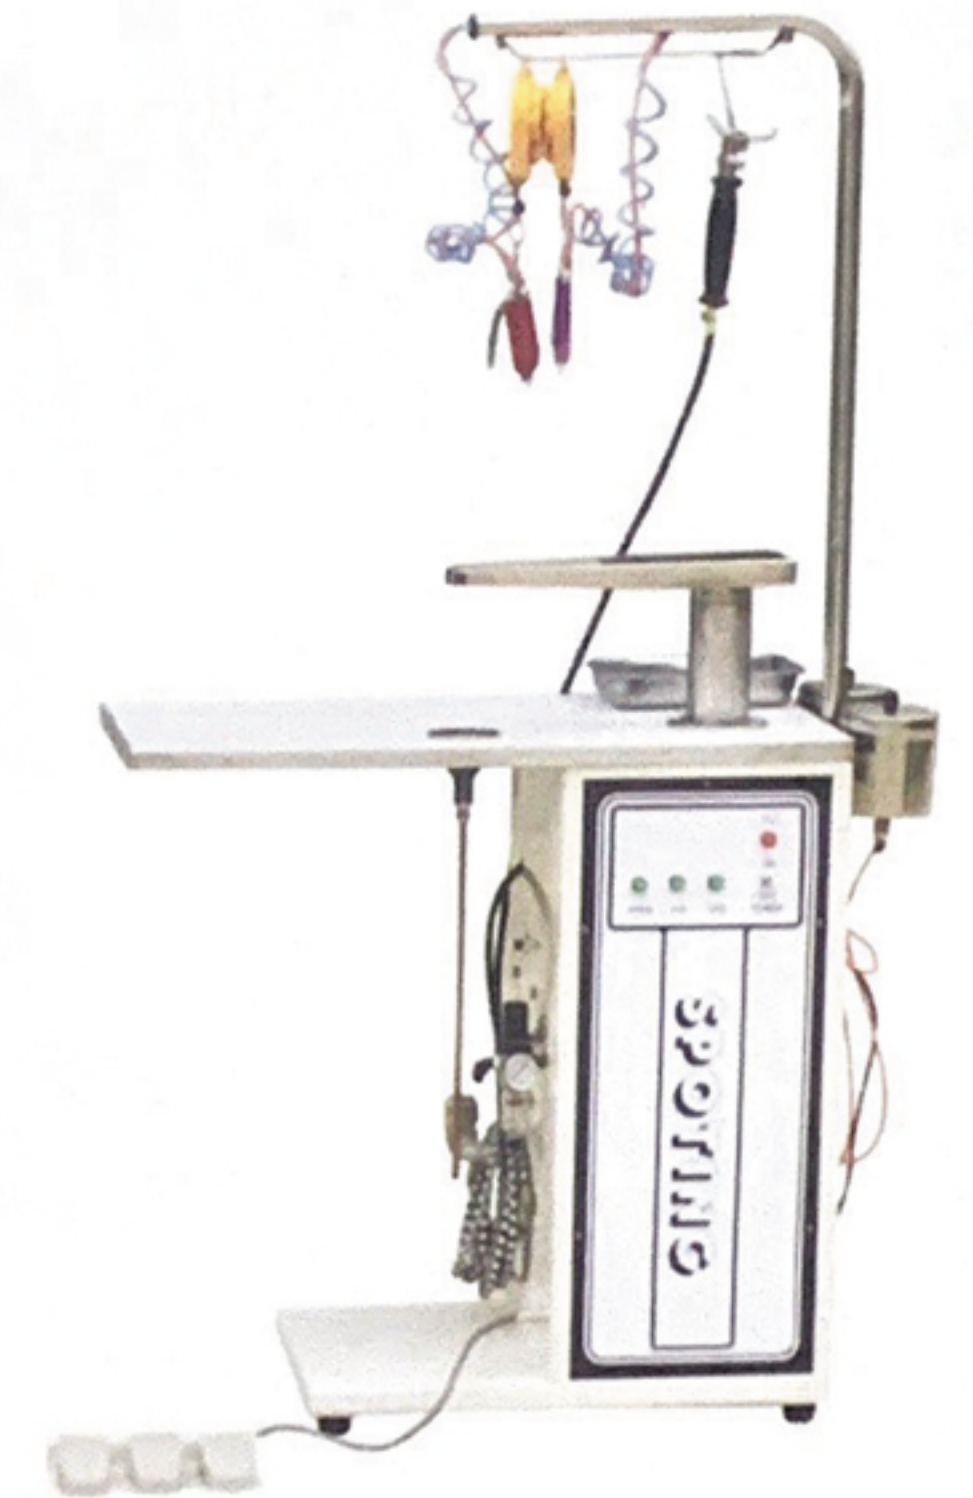

QZ-6型去渍台
QZ-6 Spotting table



多功能豪华吸鼓风烫台
AW Series Multi-functional luxury
blast ironing table



WJT-125型万用夹烫机
WJT-125 Universal press machine



衣物输送线
Clothes conveyor line



服装包装机
Clothes packing machine